



The product design is simple, stylish with rich texture, which is suitable for a 20-25 m² individual office or an open office area without compensation light and could achieve uniform lighting for one desk and two desks. The direct light 15W. The UGR is less than 10 based on the reflector and anti-glare structure, 50 beam angle and 75 beam angle optional. Indirect light 95W, 140 beam angle, luminous flux of up to 12200LM. The product can realize direct and indirect light control individually, intelligent motion sensor, daylight sensor, tunable white and other stand-alone functions based on its own control system. It also supports to customize CASAMBI, HCL, and SWARM control system. The product could provide uniform, comfortable and low glare lighting for individual offices or open office areas without compensation light.

Features

Compact and quality appearance, patent design with rich texture and visual impact

High lumen efficiency reach to 120LM/W

80° beam angle direct light with perfect UGR control UGR less than 10

140° beam angle indirect light deliver a comfortable lighting for space

Direct and indirect light control Individually

Support for smart control functions

- touch panel dimming
 - motion sensor
 - day light sensor (optional)
 - tunable white
 - CASAMBI and SOCIL control system (optional)
-

Lighting distribution cover two desks



5 years warranty

Application Areas

For personal offices, public offices and other office space.



Technical data

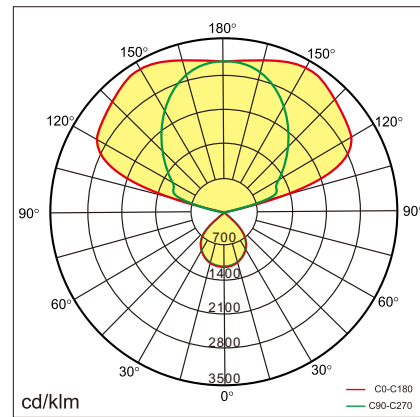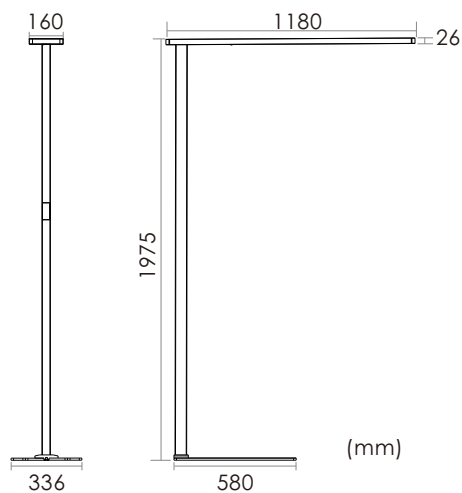

Item No.	BHIF-1911015-BD	BHIF-1911015-CD
Input Power	↑95W/15W↓	↑95W/15W↓
Input Voltage	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9
Luminous Flux	↑12000lm/1700lm↓	↑10000lm/1500lm↓
UGR	<10	<10
Color Rendering Index	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑140°/80°↓ or ↑140°/50°↓	↑140°/80°↓ or ↑140°/50°↓
CCT	3000/4000/6000K	3000~6000K
Colour consistency SDCM	< 3	< 3
Dimming	Touch panel dimming	Touch panel dimming
Sensor	Daylight sensor Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL
Protection Level	IP20	IP20
Storage Temperature	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C
Net Weight	17kg	17kg
Package size	2055*330*145mm	2055*330*145mm
20GP	280pcs	280pcs
40GP	570pcs	570pcs

Technical data

Item No.	BHIF-1914015-BD	BHIF-1914015-CD
Input Power	↑125W/15W↓	↑125W/15W↓
Input Voltage	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9
Luminous Flux	↑15000lm/1700lm↓	↑13000lm/1500lm↓
UGR	<10	<10
Color Rendering Index	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑140°/80°↓ or ↑140°/50°↓	↑140°/80°↓ or ↑140°/50°↓
CCT	3000/4000/6000K	3000~6000K
Colour consistency SDCM	< 3	< 3
Dimming	Touch panel dimming	Touch panel dimming
Sensor	Daylight sensor Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL
Protection Level	IP20	IP20
Storage Temperature	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C
Net Weight	17kg	17kg
Package size	2055*330*145mm	2055*330*145mm
20GP	280pcs	280pcs
40GP	570pcs	570pcs