

Modern and minimalist design style, coupled with exquisite materials and perfect assembly details, the product appearance looks rich in texture. Integrated die-casting and 23mm ultra-thin lamp head, good performance in heat dissipation, simpler appearance, down light adopts an original polarized lens optical module, and the high-power up light adopts the tilted polarized light design of the lamp board, makes the light distribution more uniform and comfortable in space, and the desktop light uniformity  $U_0 > 0.7$ . Interactive control panel, independent control up and down lights. Support smart functions such as presence sensor and daylight sensor. The main materials are aluminum profiles, steel, PC, PMMA; easy to install.

## Features

---

Desktop uniformity  $U_0 > 0.7$

---

Tilted panel structural polarized design for indirect light, make the illumination distribution more uniform and comfortable

---

Integrated die-cast and 23mm ultra-thin lamp head, good heat dissipation performance and simple appearance

---

Support for smart control functions

- Touch panel dimming
- Presence sensor
- Day light sensor
- CASAMBI (Customizable)
- HCL (Customizable)
- SWARM (Customizable)

---

5 years warranty

---

## Application Areas



---

Open-plan office, individual office, etc.

---



# Technical data

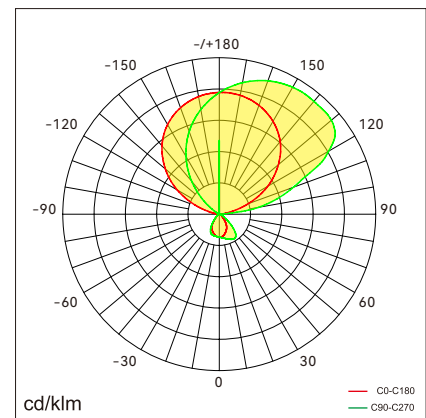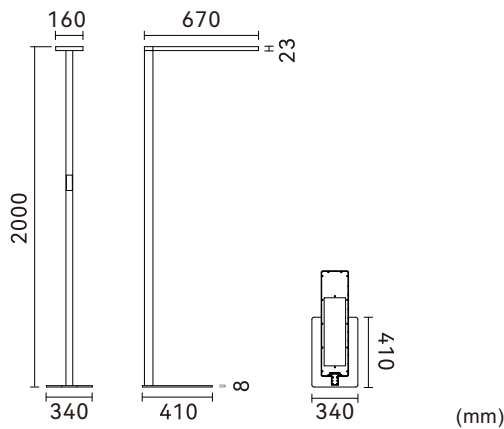

Item No.	BNOF1-2008012-BD	BNOF1-2008012-CD
Input Power(±10%)	80W (↑ 68W/12W ↓)	
Input Voltage	AC200~240V	
Power Factor	≥0.9	
Luminous Flux(±10%)	11200lm (↑ 9580lm/1620lm ↓)	10400lm (↑ 8900lm/1500lm ↓)
UGR	<14	
Color Rendering Index	>80	
Life Time	L80(B10)50,000H	
Beam Angle	↑ 100°/70° ↓ Asymmetric optics	
CCT(±200K)	3000/4000/6000K	3000~5700K
Colour consistency SDCM	<3	
Dimming	Touch panel dimming	
Sensor	Presence sensor & Day light sensor	
Housing Color	Silver / White / Black	
Fixture Materia	6063AL	
Protection Level	IP20	
Storage Temperature	-40°C~+80°C	
Working Temperature	-20°C~+40°C	
Net Weight	11.4kg	
Gross Weight	16.9kg	
Package size	2040*430*180mm (1pcs)	
20GP	182pcs	
40GP	377pcs	

# Technical data



Item No.	BNOF1-2010012-BD	BNOF1-2010012-CD
Input Power(±10%)	100W (↑ 88W/12W ↓)	
Input Voltage	AC200~240V	
Power Factor	≥0.9	
Luminous Flux(±10%)	14000lm (↑ 12380lm/1620lm ↓)	13000lm (↑ 11500lm/1500lm ↓)
UGR	<14	
Color Rendering Index	>80	
Life Time	L80(B10)50,000H	
Beam Angle	↑ 100°/70° ↓ Asymmetric optics	
CCT(±200K)	3000/4000/6000K	3000~5700K
Colour consistency SDCM	<3	
Dimming	Touch panel dimming	
Sensor	Presence sensor & Day light sensor	
Housing Color	Silver / White / Black	
Fixture Materia	6063AL	
Protection Level	IP20	
Storage Temperature	-40°C~+80°C	
Working Temperature	-20°C~+40°C	
Net Weight	11.4kg	
Gross Weight	16.9kg	
Package size	2040*430*180mm (1pcs)	
20GP	182pcs	
40GP	377pcs	

# Packaging

